




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No:	130
ISSUED:	2-87
REVISED:	9-96

SECURITY RECESSED SHELF

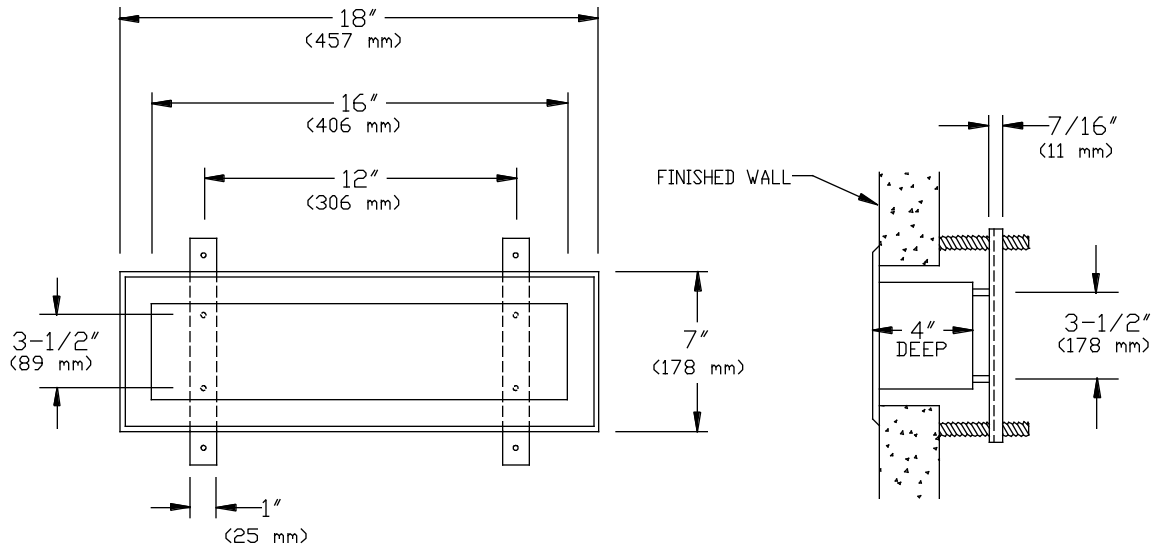

FRONT VIEW

END VIEW

SPECIFICATION

Security Recessed Shelf shall be fabricated of 18-8 alloy stainless steel, type 304, N^o 16 gauge. All exposed surfaces shall have N^o 4 satin finish. Interior shall be 4" (102mm) deep and shall have glass blasted satin matte finish. All corners shall be welded and ground smooth. Back of shelf shall be provided with four (4) welded-on anchor nuts that accept threaded studs (supplied). Back plate shall be fabricated of die-formed galvanized steel N^o 11 gauge and shall be reversible for shallow or deep wall installation. Back plate shall be provided with four (4) welded-on threaded posts to receive threaded rods of length specified at time of order and shall be equipped with four (4) washers and nuts.

Security Recessed Shelf shall be Model N^o 130 as fabricated by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For compliance with ADA Accessibility Guidelines, install unit so that shelf top is between 48" (1219mm) maximum above finished floor (AFF) and 32" (813mm) minimum AFF. For general utility mount unit 42" (1067mm) AFF or 18" (457mm) above wash basin. Mount unit through wall opening and secure to finished wall by adjusting threaded rods (supplied) to accommodate wall thickness. The length of the threaded rods is determined by the thickness of the wall on which the shelf is mounted. Specify the thickness of the wall in the following increments (e.g. 130-LT4).

Wall Thickness

Up to 4-3/4" (120mm)
4-3/4" to 6" (120mm to 152mm)
Over 6" (153mm) specify thickness:

Suffix

LT4
46
GT6 = xxx

Rough wall opening (RWO) required is 5-1/2" x 16-1/2" (141mm x 419mm)

OPERATION

Various items can be stored in the 4" (102mm) deep interior of the shelf.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.